


HS2016 6 to 16 Zone

- 6 on-board zones
- Expandable to 16 wireless and hardwired zones
- 2 PGM outputs: expandable to 22 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 2 partitions
- 500-event buffer
- 48 user codes


Available in NA, LATAM, Europe, Africa and APAC

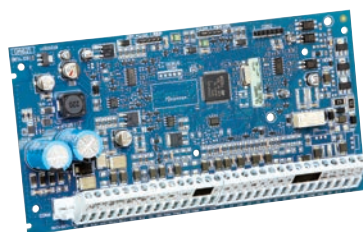

HS2016-4 8 to 32 Zone

- 8 on-board zones
- Expandable to 16 hardwired or 32 wireless zones
- 4 PGM outputs: expandable to 24 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 8 partitions
- 500-event buffer
- 48 user codes


Available in Africa

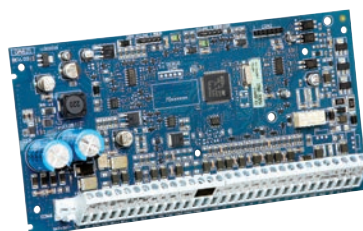

HS2032 8 to 32 Zone

- 8 on-board zones
- Expandable to 32 wireless and hardwired zones
- 2 PGM outputs: expandable to 38 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 4 partitions
- 500-event buffer
- 72 user codes


Available in NA, LATAM, Europe, Africa and APAC

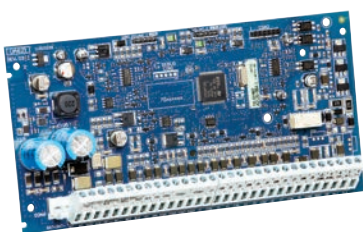

HS2064 8 to 64 Zone

- 8 on-board zones
- Expandable to 64 wireless and/or hardwired zones
- 4 PGM outputs: expandable to 80 (HSM2204, HSM2208)
- Template programming
- Connect up to 8 supervised keypads with keypad zones
- 8 partitions
- 500-event buffer
- 500 user codes

Available in NA, LATAM, Europe, Africa and APAC

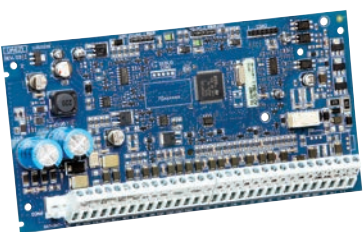

HS2128 8 to 128 Zone

- 8 on-board zones
- Expandable to 128 wireless and/or hardwired zones
- 4 PGM outputs: expandable to 148 (HSM2204, HSM2208)
- Template programming
- Connect up to 16 supervised keypads with keypad zones
- 8 partitions
- 1000-event buffer
- 1000 user codes

Available in NA, LATAM, Europe, Africa and APAC

PowerSeries Neo Feature Comparison Chart

Features	HS2016	HS2016-4	HS2032	HS2064	HS2128
Number of On-Board Zones	6	8	8	8	8
Total Zones Supported	16	32	32	64	128
Keypad Zone Expansion	Yes	Yes	Yes	Yes	Yes
Hardwired Zones	Yes	Yes	Yes	Yes	Yes
Wireless Zone Expansion	Yes	Yes	Yes	Yes	Yes
Number of Hardwired Keypads	8	8	8	8	16
Number of Wireless Keypads	8	8	8	8	16
Number of Wireless Receivers	1	1	1	1	1
Number of Wireless Repeaters	4	4	8	8	8
On-Board PGM Outputs	2	4	2	4	4
Number of Main Panel Low-Current PGM Outputs	1	1	1	1	1
Number of Main Panel High-Current PGM Outputs	1	3	1	3	3
PGM Expansion	Yes	Yes	Yes	Yes	Yes
Number of Additional High-Current PGM Outputs	4	4	4	12	16
Number of Additional Low-Current PGM Outputs	16	16	32	64	128
Number of Access Codes	47 + master	47+ Master	71 + master	499 + master	999 + master
Number of Partitions	2	8	4	8	8
Panel Event Buffer	500	500	500	500	1000
Phone Line Supervision	Yes	Yes	Yes	Yes	Yes
Siren Supervision	Yes	Yes	Yes	Yes	Yes
Bell Output	Yes	Yes	Yes	Yes	Yes
SIA CP-01 Compliant	Yes	No	Yes	Yes	Yes
SMS Command and Control	Yes	Yes	Yes	Yes	Yes
Upload/Download Support	Yes	Yes	Yes	Yes	Yes
Direct-Connect (PC Link) Downloading Support	Yes	Yes	Yes	Yes	Yes
DLS SA End-User Downloading Support	Yes	Yes	Yes	Yes	Yes
Internet Alarm Communications	Yes	Yes	Yes	Yes	Yes
Audio Alarm Verification	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)	with HSM2955(R)
Cellular Alarm Communications	Yes	Yes	Yes	Yes	Yes
Battery Required	Yes	Yes	Yes	Yes	Yes