



BRAVO 5™


A 360° ceiling-mount quad element PIR motion detector with optional integral glass break detector, Bravo5 is ideal for rooms requiring a uniform 360° detection pattern *or* for rooms requiring the benefit of having both motion and glass break detectors in one housing.

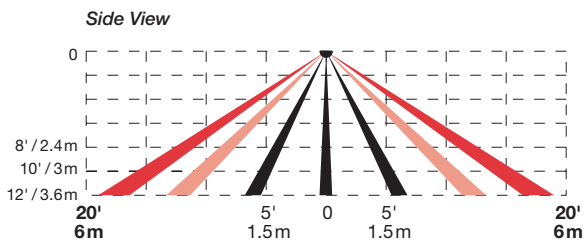

360° QUAD Element PIR... at 8' (2.4m) height

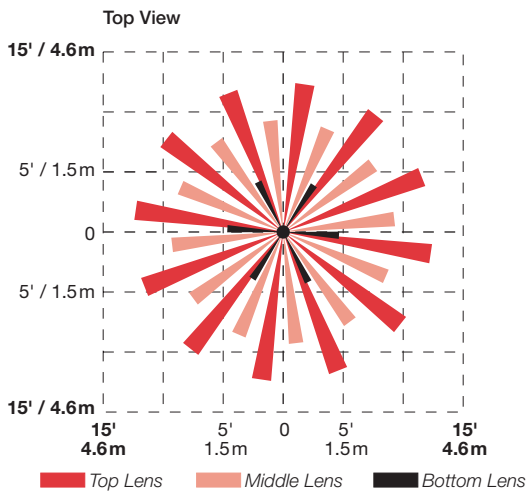

360° Glass Break Detector

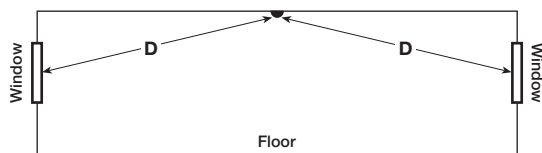

MODELS...Motion Alone

BV-500	Form 'A' alarm contact
BV-501	Form 'A' alarm contact & tamper switch
BV-502	Form 'C' alarm contact & tamper switch

MODELS...Motion & Glass Break

BV-500GB	Form 'A' alarm contact (motion), form 'C' contact (glass break)
BV-501GB	Form 'A' alarm contact (motion), form 'C' contact (glass break) & tamper switch
BV-502GB	Form 'C' alarm contact (motion), form 'C' contact (glass break) & tamper switch

SPECIFICATIONS

Electrical :

Input voltage 9 to 14.5VDC
Current (typical with glass break) 38/35mA (alarm on/off) @ 12VDC
Current (typical without glass break) 18/15mA (alarm on/off) @ 12VDC

Contact Rating :

Alarm relay (PIR) 0.1A @ 24VDC
Alarm relay (glass break) 1.0A @ 24VDC
Tamper switch 0.1A @ 24VDC

Environmental/Immunity :

Operating temperature 32 to 122°F (0 to 50°C)
Operating humidity 5% to 95% non-condensing
Radiated immunity 10V/m +80% (AM @ 1kHz) from 80MHz to 1GHz
Conducted immunity 10V +80% (AM @ 1kHz) from 150kHz to 80MHz
Transient immunity 2.4kV @ 1.2 joules

Physical :

Dimensions 4.6"Ø x 1.4" H (11.7 x 3.6cm)
Color designer white

360° PIR DETECTOR RANGE

Mounting height	8' (2.4m)	10' (3.0m)	12' (3.6m)
Detection diameter at floor	24' (7.3m)	30' (9.2m)	40' (12.2m)

360° GLASS BREAK DETECTOR RANGE

Glass Type & Thickness	Sizes	Maximum 'D' Detection Range	
		Level 1†	Level 2†
Plate/Tempered			
1/8" - 1/4" thick (3 - 6mm)	18" x 18" and up (46 x 46cm)	25' (7.6m)	15' (4.6m)
	12" x 12" to 18" x 18" (30 x 30 to 46 x 46cm)	15' (4.6m)	10' (3m)
Wired/Laminated			
1/4" thick (6mm)	18" x 18" and up (46 x 46cm)	20' (6m)	DO NOT USE
	12" x 12" to 18" x 18" (30 x 30 to 46 x 46cm)	10' (3m)	DO NOT USE

†Jumper selectable